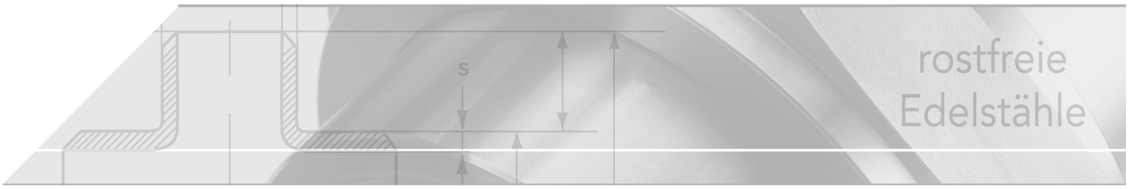

45° male angle adaptor

short name: N.33*

press fitting, M profile

DVGW-approval for water

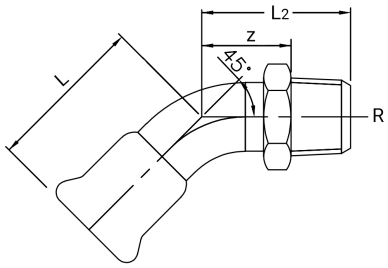

technical product sheet

Rohr-AD	R	L	L2	z	DW	Abnahme
15,0	1/2"	40,0	35	14	EPDM	DVGW
15,0	1/2"	40,0	35	14	FKM	-
18,0	1/2"	41,5	36	16	EPDM	DVGW
18,0	1/2"	41,5	36	16	FKM	-
18,0	3/4"	45,5	36	16	EPDM	DVGW
18,0	3/4"	45,5	36	16	FKM	-
22,0	3/4"	48,5	41	20	EPDM	DVGW
22,0	3/4"	48,5	41	20	FKM	-
28,0	1"	56,0	46	24	EPDM	DVGW
28,0	1"	56,0	46	24	FKM	-

available material: ask

Systeme › Pressfittings › Bogen › mit Gewinde › 45° mit AG

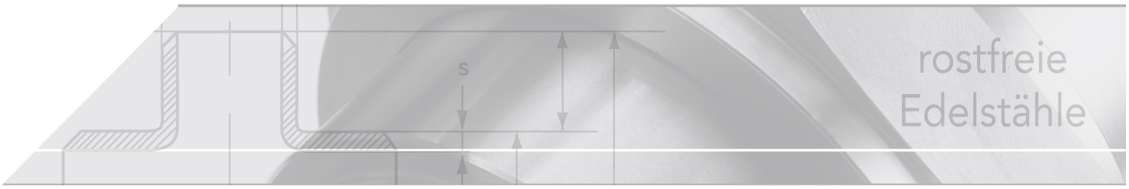

NUMEPRESS

Stainless steel press-system

Properties
Unsolvable press connection acc. to EN 10088
M profile, system independent
Nominal pressure for water applications max. 16 bar
Stainless steel 1.4404 (AISI 316L)
Male thread, conical acc. to DIN EN 10226/ ISO 7/1
DVGW-approval for water
ÖVGW-certificate for water installations
SVGW SSIGE – certificate for water distribution systems
FM APPROVED

Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C