


mufna k navaření

[zkratka označení: N.47*](#)

lisovací fitinka, M profil

povolení DVGW pro pitnou vodu




technický list výrobku

DW	Abnahme	Rohr-AD	D	s	L	z	Art.-Nr.
EPDM	DVGW	15,0	15,0	1,0	28	8	PRFI-MA-015-N
EPDM	DVGW	18,0	18,0	1,0	28	8	PRFI-MA-018-N
EPDM	DVGW	22,0	22,0	1,0	28	8	PRFI-MA-022-N
EPDM	DVGW	28,0	28,0	1,0	31	8	PRFI-MA-028-N
EPDM	DVGW	35,0	35,0	1,0	34	8	PRFI-MA-035-N
EPDM	DVGW	42,0	42,0	1,0	38	8	PRFI-MA-042-N
EPDM	DVGW	54,0	54,0	1,0	42	8	PRFI-MA-054-N
EPDM	DVGW	76,1	76,1	1,0	70	16	PRFI-MA-076-N
EPDM	DVGW	88,9	88,9	1,0	80	22	PRFI-MA-088-N
EPDM	DVGW	108,0	108,0	1,0	97	28	PRFI-MA-108-N
FKM	-	15,0	15,0	1,0	28	8	PRFI-MA-015-N-FKM
FKM	-	18,0	18,0	1,0	28	8	PRFI-MA-018-N-FKM
FKM	-	22,0	22,0	1,0	28	8	PRFI-MA-022-N-FKM
FKM	-	28,0	28,0	1,0	31	8	PRFI-MA-028-N-FKM
FKM	-	35,0	35,0	1,0	34	8	PRFI-MA-035-N-FKM
FKM	-	42,0	42,0	1,0	38	8	PRFI-MA-042-N-FKM
FKM	-	54,0	54,0	1,0	42	8	PRFI-MA-054-N-FKM
FKM	-	76,1	76,1	1,0	70	16	PRFI-MA-076-N-FKM
FKM	-	88,9	88,9	1,0	80	22	PRFI-MA-088-N-FKM
FKM	-	108,0	108,0	1,0	97	28	PRFI-MA-108-N-FKM

dostupné jakosti: 316L

Systeme > Pressfittings > gerade Verbinder > Schweißmuffe

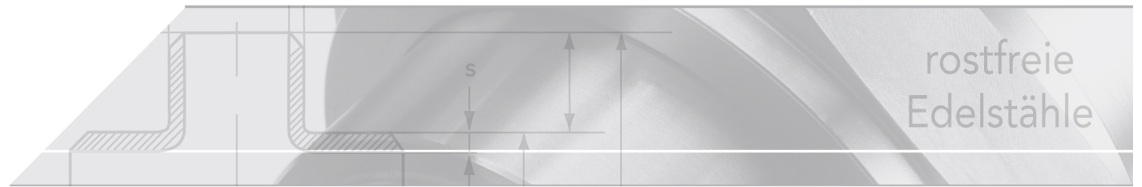

NUMEPRESS

Stainless steel press-system

Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIIG - certificate for water distribution systems

FM APPROVED

Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

