


flanges adaptor PN 6

[zkratka označení: N.52\\*](#)

lisovací,

povolení DVGW pro pitnou vodu




### technický list výrobku

DN	Rohr-AD	b	D	k	L	z	d2	Anz	DW	Abnahme
15	15,0	12	80	55	61,0	41,0	11	4	EPDM	DVGW
15	15,0	12	80	55	61,0	41,0	11	4	FKM	-
15	18,0	12	80	55	46,0	26,0	11	4	EPDM	DVGW
15	18,0	12	80	55	46,0	26,0	11	4	FKM	-
20	22,0	14	90	65	53,0	33,0	11	4	EPDM	DVGW
20	22,0	14	90	65	53,0	33,0	11	4	FKM	-
25	28,0	14	100	75	52,0	30,0	11	4	EPDM	DVGW
25	28,0	14	100	75	52,0	30,0	11	4	FKM	-
32	35,0	16	120	90	65,0	39,0	14	4	EPDM	DVGW
32	35,0	16	120	90	65,0	39,0	14	4	FKM	-
40	42,0	16	130	100	77,0	47,0	14	4	EPDM	DVGW
40	42,0	16	130	100	77,0	47,0	14	4	FKM	-
50	54,0	16	140	110	68,0	34,0	14	4	EPDM	DVGW
50	54,0	16	140	110	68,0	34,0	14	4	FKM	-
65	76,1	16	160	130	114,0	60,0	14	4	EPDM	DVGW
65	76,1	16	160	130	114,0	60,0	14	4	FKM	-
80	88,9	18	190	150	128,0	70,0	18	4	EPDM	DVGW
80	88,9	18	190	150	128,0	70,0	18	4	FKM	-
100	108,0	18	210	170	158,0	89,0	18	4	EPDM	DVGW
100	108,0	18	210	170	158,0	89,0	18	4	FKM	-

dostupné jakosti: na poptávku

Systeme &gt; Pressfittings &gt; Flansche &gt; PN 6

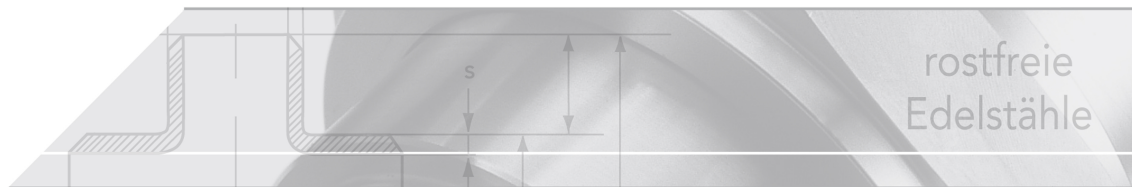

## NUMEPRESS

Stainless steel press-system

### Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

Flanges acc. to DIN EN 1092-1 PN 10/16

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIGE - certificate for water distribution systems

FM APPROVED

### Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

