


kompensátor

[zkratka označení: N.71\\*](#)

lisovací fitinka, M profil

povolení DVGW pro pitnou vodu

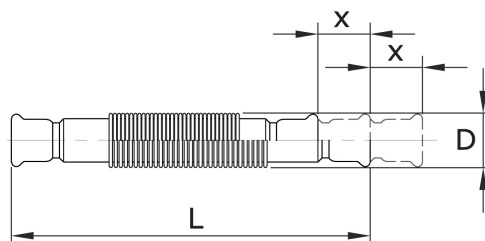


## technický list výrobku

Rohr-AD	D	L	x	DW	Abnahme
15,0	26	235	15	EPDM	DVGW
15,0	26	235	15	FKM	-
18,0	26	235	15	EPDM	DVGW
18,0	26	235	15	FKM	-
22,0	31	241	15	EPDM	DVGW
22,0	31	241	15	FKM	-
28,0	40	241	15	EPDM	DVGW
28,0	40	241	15	FKM	-
35,0	40	251	15	EPDM	DVGW
35,0	40	251	15	FKM	-
42,0	48	261	15	EPDM	DVGW
42,0	48	261	15	FKM	-
54,0	71	269	15	EPDM	DVGW
54,0	71	269	15	FKM	-
76,1	88	353	20	EPDM	DVGW
76,1	88	353	20	FKM	-
88,9	105	494	25	EPDM	DVGW
88,9	105	494	25	FKM	-
108,0	128	434	25	EPDM	DVGW
108,0	128	434	25	FKM	-

dostupné jakosti: na poptávku

Systeme &gt; Pressfittings &gt; Kompensatoren &gt; Axial

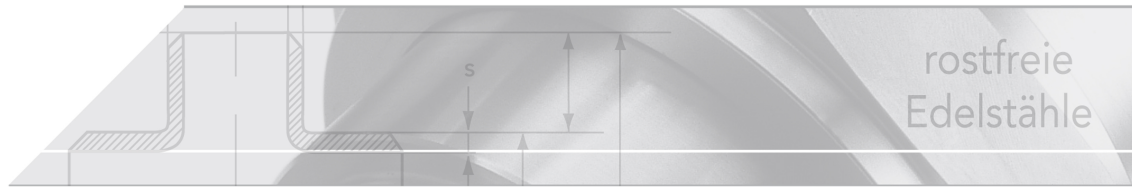

## NUMEPRESS

Stainless steel press-system

### Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIIG - certificate for water distribution systems

FM APPROVED

### Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

