


hadic. nástav. s vnitř. Závite  
dle ISO 228-1

[zkratka označení: TÜMU.G\\*](#)

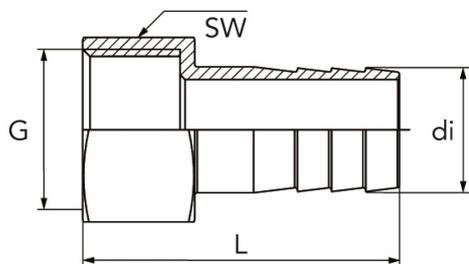

### technický list výrobku

G	L	di	SW	kg	Art.-Nr.
1/4"	39	9,0	18	0,022	TÜMU-014X09-G
3/8"	38	9,5	20	0,026	TÜMU-038X09-G
1/2"	45	12,7	26	0,054	TÜMU-012X12-G
3/4"	53	19,5	31	0,078	TÜMU-034X19-G
1"	60	25,4	37	0,100	TÜMU-100X25-G
1 1/4"	67	31,8	46	0,168	TÜMU-114X31-G
1 1/2"	72	38,1	53	0,224	TÜMU-112X38-G
1 1/2"	76	38,1	53	0,224	TÜMU-112X38-G
2"	80	51,4	64	0,350	TÜMU-200X51-G

dostupné jakosti: V4A

Fitinky závitové > fitinky > PN 10 (ECO-Line) > hadicový nástavec > s vnitřním závitem



### hose nozzle

- > cast version
- > material AISI 316/ 1.4408 (V4A)
- > inspection certificate according to DIN EN 10204-3.1
- > cylindrical female thread according to DIN ISO 228-1 (code: G)

