


lisovací hrdlo

M profil


[zkratka označení: N.01BIG*](#)

technický list výrobku

| DW | Rohr-AD | s | L | z | Art.-Nr. |
|------|---------|-----|-----|----|------------------|
| EPDM | 139,7 | 2,0 | 250 | 54 | PRFI-MU-139-NX20 |
| EPDM | 168,3 | 2,0 | 300 | 64 | PRFI-MU-168-NX20 |

dostupné jakosti: na poptávku

Systémy > lisovací fitinky > hrdla > dvojité hrdlo

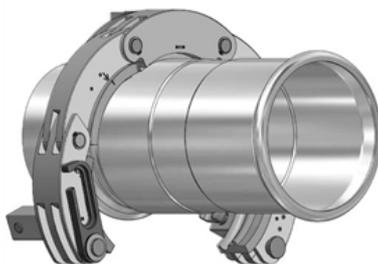

NUMEPRESS

Stainless steel press-system

Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIIG - certificate for water distribution systems

FM APPROVED

Gaskets

| Material | Colour | Application | Temperature |
|----------|--------|---------------------------|----------------|
| EPDM | black | water | -20° - +110° C |
| FKM | green | solar, oil, compressed ai | -30° - +180° C |
| FPM | red | steam | -20° - +200° C |

