


socket, seamless DIN EN 10241


[short name: MU.\\*](#)


## technical product sheet

Rp	L	D	PN	kg	Art.-Nr.
1/8"	17	14,0	40	0,012	MU-018-000
1/4"	25	18,5	40	0,030	MU-014-000
3/8"	26	21,5	40	0,034	MU-038-000
1/2"	34	26,5	40	0,067	MU-012-000
3/4"	36	31,8	40	0,081	MU-034-000
1"	43	39,5	40	0,146	MU-100-000
1 1/4"	48	48,3	20	0,200	MU-114-000
1 1/2"	48	54,5	20	0,240	MU-112-000
2"	56	66,3	20	0,330	MU-200-000
2 1/2"	65	82,0	16	0,520	MU-212-000
3"	71	95,0	16	0,700	MU-300-000
4"	83	122,0	16	1,280	MU-400-000

available material: 1.4571, 304L, 316L

Threaded fittings &gt; fittings &gt; PN 10 (ECO-Line) &gt; sockets &gt; full

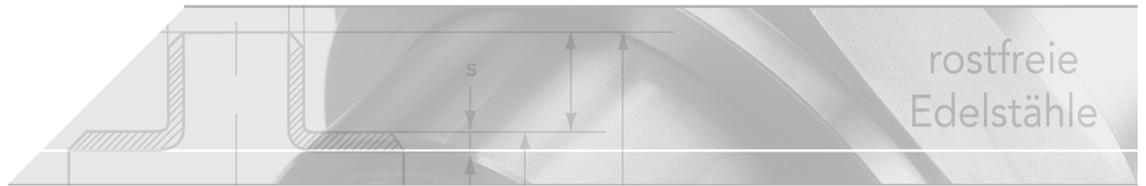

## Socket

with continuous inner thread

### Version

DIN EN 10241:2000 (old DIN 2986)

Moderate-duty design: Optional heavy-duty/thick-walled design available on request

made of seamless tube

stainless steel material-no. 1.4307/ 1.4571/ 1.4404 optional 1.4541 / 1.4539 / 1.4828 / ...

Pressure level PN 100/ 40 (optional with PED-admission)

Thread DIN EN 10226-1:2004 (old DIN 2999) or ISO 7-1 (Connections sealing in the thread)

cylindrical inner thread, code Rp

