


reducing tee, short
butt weld ends, no. 5228

[short name: 5228*](#)

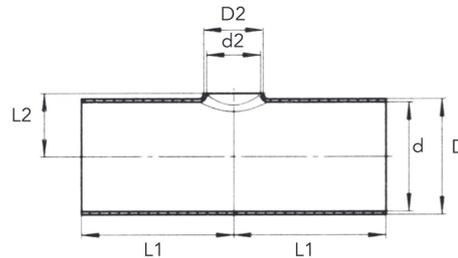

technical product sheet


O	Reihe	DN	DN2	D	D2	s	L	d	d2	L1	L2	Art.-Nr.
matt	Reihe 1	20	15	22,0	18,0	1,5	80,0	19	15	40,0	12,0	RT-020-R15
matt	Reihe 1	25	15	28,0	18,0	1,5	100,0	25	15	50,0	16,0	RT-025-R15
matt	Reihe 1	25	20	28,0	22,0	1,5	100,0	25	19	50,0	16,0	RT-025-R20
matt	Reihe 1	32	15	34,0	18,0	1,5	110,0	31	15	55,0	20,0	RT-032-R15
matt	Reihe 1	32	20	34,0	22,0	1,5	110,0	31	19	55,0	20,0	RT-032-R20
matt	Reihe 1	32	25	34,0	28,0	1,5	110,0	31	25	55,0	20,0	RT-032-R25
matt	Reihe 1	40	15	40,0	18,0	1,5	120,0	37	15	60,0	23,0	RT-040-R15
matt	Reihe 1	40	20	40,0	22,0	1,5	120,0	37	19	60,0	23,0	RT-040-R20
matt	Reihe 1	40	25	40,0	28,0	1,5	120,0	37	25	60,0	23,0	RT-040-R25
matt	Reihe 1	40	32	40,0	34,0	1,5	120,0	37	31	60,0	23,0	RT-040-R32
matt	Reihe 1	50	15	52,0	18,0	1,5	140,0	49	15	70,0	29,0	RT-050-R15
matt	Reihe 1	50	20	52,0	22,0	1,5	140,0	49	19	70,0	29,0	RT-050-R20
matt	Reihe 1	50	25	52,0	28,0	1,5	140,0	49	25	70,0	29,0	RT-050-R25
matt	Reihe 1	50	32	52,0	34,0	1,5	140,0	49	31	70,0	29,0	RT-050-R32
matt	Reihe 1	50	40	52,0	40,0	1,5	140,0	49	37	70,0	29,0	RT-050-R40
matt	Reihe 2	15	10	19,0	13,0	1,5	70,0	16	10	35,0	8,5	RT-015-010
matt	Reihe 2	20	15	23,0	19,0	1,5	80,0	20	16	40,0	12,0	RT-020-015
matt	Reihe 2	25	10	29,0	13,0	1,5	100,0	25	10	50,0	16,0	RT-025-010
matt	Reihe 2	25	15	29,0	19,0	1,5	100,0	26	16	50,0	16,0	RT-025-015
matt	Reihe 2	25	20	29,0	23,0	1,5	100,0	26	20	50,0	16,0	RT-025-020
matt	Reihe 2	32	15	35,0	19,0	1,5	110,0	32	16	55,0	20,0	RT-032-015
matt	Reihe 2	32	20	35,0	23,0	1,5	110,0	32	20	55,0	20,0	RT-032-020
matt	Reihe 2	32	25	35,0	29,0	1,5	110,0	32	26	55,0	20,0	RT-032-025
matt	Reihe 2	40	15	41,0	19,0	1,5	120,0	38	16	60,0	23,0	RT-040-015
matt	Reihe 2	40	20	41,0	23,0	1,5	120,0	38	20	60,0	23,0	RT-040-020
matt	Reihe 2	40	25	41,0	29,0	1,5	120,0	38	26	60,0	23,0	RT-040-025
matt	Reihe 2	40	32	41,0	35,0	1,5	120,0	38	32	60,0	23,0	RT-040-032
matt	Reihe 2	50	15	53,0	19,0	1,5	140,0	50	16	70,0	29,0	RT-050-015
matt	Reihe 2	50	20	53,0	23,0	1,5	140,0	50	20	70,0	29,0	RT-050-020
matt	Reihe 2	50	25	53,0	29,0	1,5	140,0	50	26	70,0	29,0	RT-050-025
matt	Reihe 2	50	32	53,0	35,0	1,5	140,0	50	32	70,0	29,0	RT-050-032
matt	Reihe 2	50	40	53,0	41,0	1,5	140,0	50	38	70,0	29,0	RT-050-040
matt	Reihe 2	65	15	70,0	19,0	2,0	160,0	66	16	80,0	39,0	RT-065-015
matt	Reihe 2	65	20	70,0	23,0	2,0	160,0	66	20	80,0	39,0	RT-065-020
matt	Reihe 2	65	25	70,0	29,0	2,0	160,0	66	26	80,0	39,0	RT-065-025
matt	Reihe 2	65	32	70,0	35,0	2,0	160,0	66	32	80,0	39,0	RT-065-032

O	Reihe	DN	DN2	D	D2	s	L	d	d2	L1	L2	Art.-Nr.
matt	Reihe 2	65	40	70,0	41,0	2,0	160,0	66	38	80,0	39,0	RT-065-040
matt	Reihe 2	65	50	70,0	53,0	2,0	160,0	66	50	80,0	39,0	RT-065-050
matt	Reihe 2	80	20	85,0	23,0	2,0	180,0	81	20	90,0	47,0	RT-080-020
matt	Reihe 2	80	25	85,0	29,0	2,0	180,0	81	26	90,0	47,0	RT-080-025
matt	Reihe 2	80	32	85,0	35,0	2,0	180,0	81	32	90,0	47,0	RT-080-032
matt	Reihe 2	80	40	85,0	41,0	2,0	180,0	81	38	90,0	47,0	RT-080-040
matt	Reihe 2	80	50	85,0	53,0	2,0	180,0	81	50	90,0	47,0	RT-080-050
matt	Reihe 2	80	65	85,0	70,0	2,0	180,0	81	66	90,0	47,0	RT-080-065
matt	Reihe 2	100	25	104,0	29,0	2,0	200,0	100	26	100,0	57,0	RT-100-025
matt	Reihe 2	100	32	104,0	35,0	2,0	200,0	100	32	100,0	57,0	RT-100-032
matt	Reihe 2	100	40	104,0	41,0	2,0	200,0	100	38	100,0	57,0	RT-100-040
matt	Reihe 2	100	50	104,0	53,0	2,0	200,0	100	50	100,0	57,0	RT-100-050
matt	Reihe 2	100	65	104,0	70,0	2,0	200,0	100	66	100,0	58,0	RT-100-065
matt	Reihe 2	100	80	104,0	85,0	2,0	200,0	100	81	100,0	58,0	RT-100-080
matt	Reihe 2	125	25	129,0	29,0	2,0	375,0	125	26	187,5	71,5	RT-125-025
matt	Reihe 2	125	32	129,0	35,0	2,0	375,0	125	32	187,5	71,5	RT-125-032
matt	Reihe 2	125	40	129,0	41,0	2,0	375,0	125	38	187,5	71,5	RT-125-040
matt	Reihe 2	125	50	129,0	53,0	2,0	375,0	125	50	187,5	71,5	RT-125-050
matt	Reihe 2	125	65	129,0	70,0	2,0	375,0	125	66	187,5	71,5	RT-125-065
matt	Reihe 2	125	80	129,0	85,0	2,0	375,0	125	81	187,5	71,5	RT-125-080
matt	Reihe 2	125	100	129,0	104,0	2,0	375,0	125	100	187,5	71,5	RT-125-100
matt	Reihe 2	150	40	154,0	41,0	2,0	450,0	150	38	225,0	87,0	RT-150-040
matt	Reihe 2	150	50	154,0	53,0	2,0	450,0	150	50	225,0	87,0	RT-150-050
matt	Reihe 2	150	65	154,0	70,0	2,0	450,0	150	66	225,0	87,0	RT-150-065
matt	Reihe 2	150	80	154,0	85,0	2,0	450,0	150	81	225,0	87,0	RT-150-080
matt	Reihe 2	150	100	154,0	104,0	2,0	450,0	150	100	225,0	87,0	RT-150-100
matt	Reihe 2	150	125	154,0	129,0	2,0	450,0	150	125	225,0	87,0	RT-150-125
matt	Reihe 2	200	125	204,0	129,0	2,0	600,0	200	125	300,0	107,0	RT-200-125
matt	Reihe 2	200	150	204,0	154,0	2,0	600,0	200	150	300,0	107,0	RT-200-150
poliert	Reihe 1	20	15	22,0	18,0	1,5	80,0	19	15	40,0	12,0	GL-522-RCB
poliert	Reihe 1	25	15	28,0	18,0	1,5	100,0	25	15	50,0	16,0	GL-522-RDB
poliert	Reihe 1	25	20	28,0	22,0	1,5	100,0	25	19	50,0	16,0	GL-522-RDC
poliert	Reihe 1	32	15	34,0	18,0	1,5	110,0	31	15	55,0	20,0	GL-522-REB
poliert	Reihe 1	32	20	34,0	22,0	1,5	110,0	31	19	55,0	20,0	GL-522-REC
poliert	Reihe 1	32	25	34,0	28,0	1,5	110,0	31	25	55,0	20,0	GL-522-RED
poliert	Reihe 1	40	15	40,0	18,0	1,5	120,0	37	15	60,0	23,0	GL-522-RFB
poliert	Reihe 1	40	20	40,0	22,0	1,5	120,0	37	19	60,0	23,0	GL-522-RFC
poliert	Reihe 1	40	25	40,0	28,0	1,5	120,0	37	25	60,0	23,0	GL-522-RFD
poliert	Reihe 1	40	32	40,0	34,0	1,5	120,0	37	31	60,0	23,0	GL-522-RFE
poliert	Reihe 1	50	15	52,0	18,0	1,5	140,0	49	15	70,0	29,0	GL-522-RGB
poliert	Reihe 1	50	20	52,0	22,0	1,5	140,0	49	19	70,0	29,0	GL-522-RGC
poliert	Reihe 1	50	25	52,0	28,0	1,5	140,0	49	25	70,0	29,0	GL-522-RGD
poliert	Reihe 1	50	32	52,0	34,0	1,5	140,0	49	31	70,0	29,0	GL-522-RGE
poliert	Reihe 1	50	40	52,0	40,0	1,5	140,0	49	37	70,0	29,0	GL-522-RGF
poliert	Reihe 1	65	15	70,0	18,0	2,0	160,0	66	15	80,0	39,0	GL-522-RHB
poliert	Reihe 1	65	20	70,0	22,0	2,0	160,0	66	19	80,0	39,0	GL-522-RHC
poliert	Reihe 1	65	25	70,0	28,0	2,0	160,0	66	25	80,0	39,0	GL-522-RHD
poliert	Reihe 1	65	32	70,0	34,0	2,0	160,0	66	31	80,0	39,0	GL-522-RHE
poliert	Reihe 1	65	40	70,0	40,0	2,0	160,0	66	37	80,0	39,0	GL-522-RHF
poliert	Reihe 1	65	50	70,0	52,0	2,0	160,0	66	49	80,0	39,0	GL-522-RHG
poliert	Reihe 2	20	15	23,0	19,0	1,5	80,0	20	16	40,0	12,0	GL-522-0CA
poliert	Reihe 2	25	15	29,0	19,0	1,5	100,0	26	16	50,0	16,0	GL-522-0DB
poliert	Reihe 2	25	20	29,0	23,0	1,5	100,0	26	20	50,0	16,0	GL-522-0DC
poliert	Reihe 2	32	15	35,0	19,0	1,5	110,0	32	16	55,0	20,0	GL-522-0EB
poliert	Reihe 2	32	20	35,0	23,0	1,5	110,0	32	20	55,0	20,0	GL-522-0EC
poliert	Reihe 2	32	25	35,0	29,0	1,5	110,0	32	26	55,0	20,0	GL-522-0ED
poliert	Reihe 2	40	15	41,0	19,0	1,5	120,0	38	16	60,0	23,0	GL-522-0FB
poliert	Reihe 2	40	20	41,0	23,0	1,5	120,0	38	20	60,0	23,0	GL-522-0FC

O	Reihe	DN	DN2	D	D2	s	L	d	d2	L1	L2	Art.-Nr.
poliert	Reihe 2	40	25	41,0	29,0	1,5	120,0	38	26	60,0	23,0	GL-522-0FD
poliert	Reihe 2	40	32	41,0	35,0	1,5	120,0	38	32	60,0	23,0	GL-522-0FE
poliert	Reihe 2	50	15	53,0	19,0	1,5	140,0	50	16	70,0	29,0	GL-522-0GB
poliert	Reihe 2	50	20	53,0	23,0	1,5	140,0	50	20	70,0	29,0	GL-522-0GC
poliert	Reihe 2	50	25	53,0	29,0	1,5	140,0	50	26	70,0	29,0	GL-522-0GD
poliert	Reihe 2	50	32	53,0	35,0	1,5	140,0	50	32	70,0	29,0	GL-522-0GE
poliert	Reihe 2	50	40	53,0	41,0	1,5	140,0	50	38	70,0	29,0	GL-522-0GF
poliert	Reihe 2	65	15	70,0	19,0	2,0	160,0	66	16	80,0	39,0	GL-522-0HB
poliert	Reihe 2	65	20	70,0	23,0	2,0	160,0	66	20	80,0	39,0	GL-522-0HC
poliert	Reihe 2	65	25	70,0	29,0	2,0	160,0	66	26	80,0	39,0	GL-522-0HD
poliert	Reihe 2	65	32	70,0	35,0	2,0	160,0	66	32	80,0	39,0	GL-522-0HE
poliert	Reihe 2	65	40	70,0	41,0	2,0	160,0	66	38	80,0	39,0	GL-522-0HF
poliert	Reihe 2	65	50	70,0	53,0	2,0	160,0	66	50	80,0	39,0	GL-522-0HG
poliert	Reihe 2	80	20	85,0	23,0	2,0	180,0	81	20	90,0	47,0	GL-522-0IC
poliert	Reihe 2	80	25	85,0	29,0	2,0	180,0	81	26	90,0	47,0	GL-522-0ID
poliert	Reihe 2	80	32	85,0	35,0	2,0	180,0	81	32	90,0	47,0	GL-522-0IE
poliert	Reihe 2	80	40	85,0	41,0	2,0	180,0	81	38	90,0	47,0	GL-522-0IF
poliert	Reihe 2	80	50	85,0	53,0	2,0	180,0	81	50	90,0	47,0	GL-522-0IG
poliert	Reihe 2	80	65	85,0	70,0	2,0	180,0	81	66	90,0	47,0	GL-522-0IH
poliert	Reihe 2	100	25	104,0	29,0	2,0	200,0	100	26	100,0	57,0	GL-522-0JD
poliert	Reihe 2	100	32	104,0	35,0	2,0	200,0	100	32	100,0	57,0	GL-522-0JE
poliert	Reihe 2	100	40	104,0	41,0	2,0	200,0	100	38	100,0	57,0	GL-522-0JF
poliert	Reihe 2	100	50	104,0	53,0	2,0	200,0	100	50	100,0	57,0	GL-522-0JG
poliert	Reihe 2	100	65	104,0	70,0	2,0	200,0	100	66	100,0	58,0	GL-522-0JH
poliert	Reihe 2	100	80	104,0	85,0	2,0	200,0	100	81	100,0	58,0	GL-522-0JI
poliert	Reihe 2	125	25	129,0	29,0	2,0	375,0	125	26	187,5	71,5	GL-522-0KD
poliert	Reihe 2	125	32	129,0	35,0	2,0	375,0	125	32	187,5	71,5	GL-522-0KE
poliert	Reihe 2	125	40	129,0	41,0	2,0	375,0	125	38	187,5	71,5	GL-522-0KF
poliert	Reihe 2	125	50	129,0	53,0	2,0	375,0	125	50	187,5	71,5	GL-522-0KG
poliert	Reihe 2	125	65	129,0	70,0	2,0	375,0	125	66	187,5	71,5	GL-522-0KH
poliert	Reihe 2	125	80	129,0	85,0	2,0	375,0	125	81	187,5	71,5	GL-522-0KI
poliert	Reihe 2	125	100	129,0	104,0	2,0	375,0	125	100	187,5	71,5	GL-522-0KJ
poliert	Reihe 2	150	40	154,0	41,0	2,0	450,0	150	38	225,0	87,0	GL-522-0LF
poliert	Reihe 2	150	50	154,0	53,0	2,0	450,0	150	50	225,0	87,0	GL-522-0LG
poliert	Reihe 2	150	65	154,0	70,0	2,0	450,0	150	66	225,0	87,0	GL-522-0LH
poliert	Reihe 2	150	80	154,0	85,0	2,0	450,0	150	81	225,0	87,0	GL-522-0LI
poliert	Reihe 2	150	100	154,0	104,0	2,0	450,0	150	100	225,0	87,0	GL-522-0LJ
poliert	Reihe 2	150	125	154,0	129,0	2,0	450,0	150	125	225,0	87,0	GL-522-0LK

available material: V4A

Beverage fittings > fittings > reducing tees > short

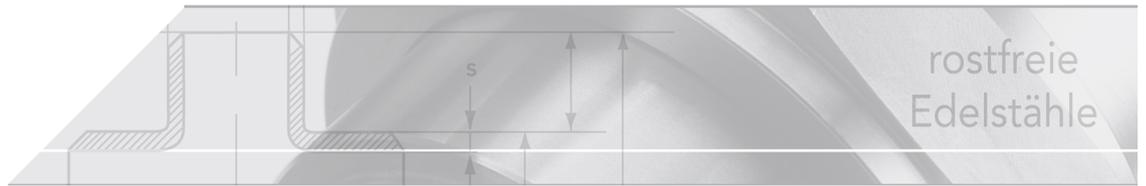

Reducing tee, short

for the food industry

Manufactured of pipe DIN 11850 table 4.

Materials

V2A: 1.4301/ 1.4306, 1.4307 or AISI 304/ 304L

V4A: 1.4404 or AISI 316L

Surface

Version	Number
matt	5228
polishedt	5228p

Permissible pressure acc. to DIN 11852

Nominal diameter	Pressure level
DN 10 - 50	25 bar
DN 65 - 80	16 bar
DN 100	12,5 bar
DN 125	10 bar
DN 150	8 bar
DN 200	5 bar

