


adapter nipple


 short name: [DNRN\\*](#)


## technical product sheet

Ausf	AG	D	L	s
Standard	1/4"	13,5	40	2,30
Standard	1/2"	21,3	60	2,60
Standard	3/4"	26,9	60	2,60
Standard	1"	33,7	60	3,20
Standard	1 1/4"	42,4	80	3,20
Standard	1 1/2"	48,3	80	3,20
Standard	2"	60,3	100	3,65
Standard	2 1/2"	76,1	100	3,65
Standard	3"	88,9	120	3,65
Standard	4"	114,3	150	4,00
Sonderlänge	1/4"	13,5	80	2,30
Sonderlänge	1/2"	21,3	40	2,60
Sonderlänge	1/2"	21,3	120	2,60
Sonderlänge	3/4"	26,9	40	2,60
Sonderlänge	1"	33,7	50	3,20
Sonderlänge	1"	33,7	100	3,25
Sonderlänge	1 1/2"	48,3	60	3,20
Sonderlänge	2"	60,3	80	3,65
Sonderlänge	2"	60,3	120	3,65

available material: 1.4404

Threaded fittings &gt; fittings &gt; PN 10 (ECO-Line) &gt; nipples &gt; barrel nipples &gt; BSP x NPT

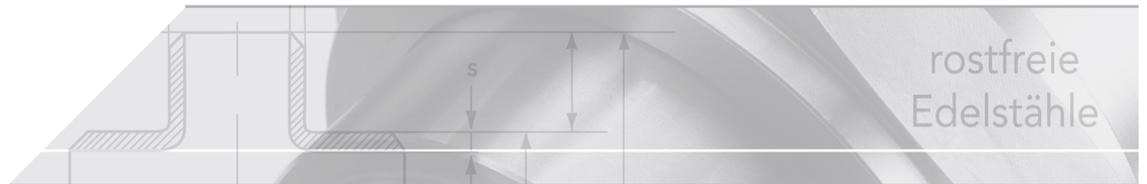

Double pipe nozzle, seamless made of stainless steel

**Threads:**

Whitworth-Pipe threads according to DIN 2999

Type of thread	Version	Code
Inner thread	cylindrical	Rp
Outer thread	tapered	R

**Application:**

For threaded pipes and fittings, sealed using sealing material in the threads.

Connections sealed in the threads are specified in various national and international standards (ISO 7/1, BS 21, DIN 2999).